



The **Apéro** is a scaled-down model with the main features of the Alto, Mezzo and Solo at a lower price and a 120-V option.

# Apéro

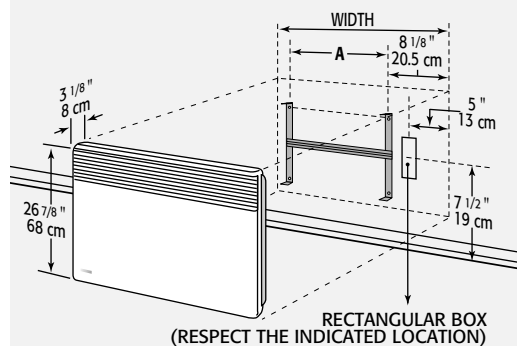


		A				
500 W	750 W	1 000 W	1 250 W	1 500 W	1 750 W	2 000 W
2 3/4 in 7 cm	5 1/2 in 14 cm	7 1/8 in 18 cm	9 3/4 in 25 cm	12 5/8 in 32 cm	16 in 40,5 cm	16 in 40,5 cm


## HEATING ELEMENT

 **Basic heating Convection** : X-shaped, monoblock element made of surface-treated extruded aluminum. (500 to 2000 W) Automatic reset overheat protection. 120-V unit: Manual reset overheat protection.

## TEMPERATURE CONTROL

 **Electronic thermostat** Built-in electronic proportional-action thermostat ultrasensitive to 1/10°C (1/5°F)

## CONTROL PANEL


 **Location** Located on top right hand side of the unit.

**Switch** On/Off switch.

**Dial** Thermostat control dial can be locked.

**Indicator light** Heating indicator light.

## CABINET


 **Steel construction** with polyester/epoxy anti-rust powder coating.

**Cabinet** Bottom-mounted protective pan.

**Louvers** Front-louvered air outlet that hides the unit interior and directs heat towards the centre of the room.

**Color** **BM** = Mimetic White

## INSTALLATION

 **Installation** Quick-mounted surface installation with easy snap-on bracket that also serves as marking template.

**Connection** 240-V unit: Flexible cord connection, including junction box cover. Installation requires 2" X 3" wall box (not included).  
120-V unit: Plug-in connection with 6' flexible cord.

**Installation height** 4 in (10 cm).

**Clearances** ■ **Front**: 20 in (50 cm)    ◀ **Sides**: 6 in (15 cm)    ▲ **Above**: 4 in (10 cm).

MODEL	Catalog No.	Color	Power		Height		Width		Thickness		Weight	
			240-V	208-V	cm	in	cm	in	cm	in	kg	p
APÉRO ③	7358-C05	BM	500 W	375 W	44,5	17 1/2	34	13 3/8	10	4	3,6	7,9
	7358-C07	BM	750 W	562 W	44,5	17 1/2	42	16 1/2	10	4	4,1	9,1
	7358-C10	BM	1 000 W	750 W	44,5	17 1/2	50	19 5/8	10	4	4,8	10,6
	7358-C12	BM	1 250 W	937 W	44,5	17 1/2	58	22 7/8	10	4	5,3	11,7
	7358-C15	BM	1 500 W	1 125 W	44,5	17 1/2	66	26	10	4	6,1	13,3
	7358-C17	BM	1 750 W	1 312 W	44,5	17 1/2	74	29 1/8	10	4	6,6	14,6
	7358-C20	BM	2 000 W	1 500 W	44,5	17 1/2	82	32 1/4	10	4	7,2	15,7

### 120 VOLTS PLUG-IN

APÉRO ④	7358-B05	BM	500 W	44,5	17 1/2	34	13 3/8	10	4	3,6	7,9
	7358-B12	BM	1 250 W	44,5	17 1/2	66	26	10	4	5,3	11,7

③ Not compatible with the Convectair Programmer system.

④ Not compatible with the Convectair Programmer system; plugs into a 120-V socket.

For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor.

